RXLB Thin Aluminum-Housed Wirewound Resistor

Features

- Excellent high-temperature load performance.
- High overload capability.
- RoHS compliant.
- Compact appearance and easy installation.


Applications

- Power distribution and load testing.
- Power supplies and inverter power supplies.
- Soft starting and braking in industrial servo drive systems.



Power range: 40-150 W

Outline Dimensions • mm

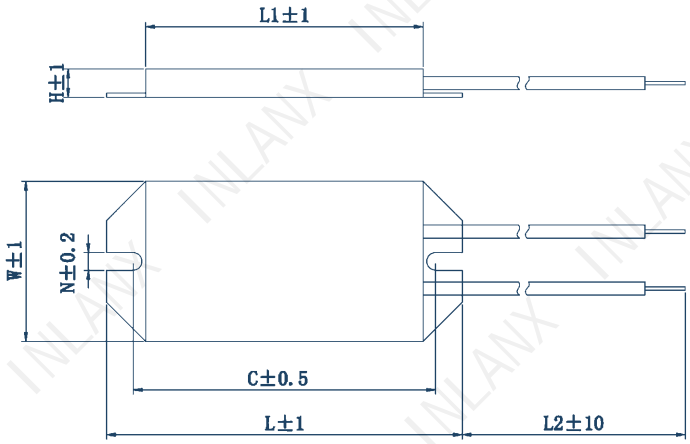

Specifications and Dimensions

Power W	Resistance Ω	L mm	L1 mm	W mm	H mm	C mm	N mm	L2 mm
40	1Ω-100Ω	100	75	45	8	85	5.0	Custom
40	1Ω-100Ω	107	93	30	8.5	102	4.3	Custom
60	1Ω-100Ω	118	93	45	8	103	5.0	Custom
80	1Ω-100Ω	120	100	45	8	105	5.0	Custom
80	1Ω-100Ω	95	80	50	10	85	5.0	Custom
120	1Ω-100Ω	117	101	50	10	107	5.0	Custom
150	1Ω-100Ω	195	180	60	12.5	185	4.5	Custom

Dimensions in mm; lead length can be customized. Resistance tolerance: ±5% (J), ±10% (K).

Ordering Example

RXLB - 80W - 50Ω - ±5%

Model / Power / Nominal resistance / Tolerance