RXLG-A Aluminum-Housed Wirewound Resistor

Features

- Excellent high-temperature load performance.
- High overload capability.
- RoHS compliant.
- Compact appearance and easy installation.


Applications

- Power distribution and load testing.
- Power supplies and inverter power supplies.
- Soft starting and braking in industrial servo drive systems.



Power range: 60-150 W

Outline Dimensions • mm

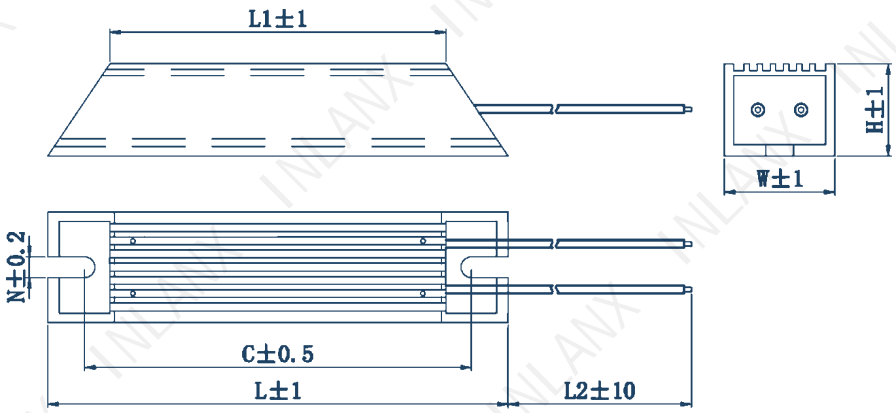


Specifications and Dimensions

Power W	Resistance Ω	L mm	L1 mm	W mm	H mm	C mm	N mm	L2 mm
60	1Ω-2kΩ	100	70	25	20	84	5.6	Custom
80	1Ω-2kΩ	120	90	25	20	104	5.6	Custom
100	1Ω-2kΩ	120	90	30	20	104	5.6	Custom
150	1Ω-2kΩ	148	118	30	20	131	5.6	Custom

Dimensions in mm; lead length can be customized. Resistance tolerance: ±5% (J), ±10% (K).

Power Derating

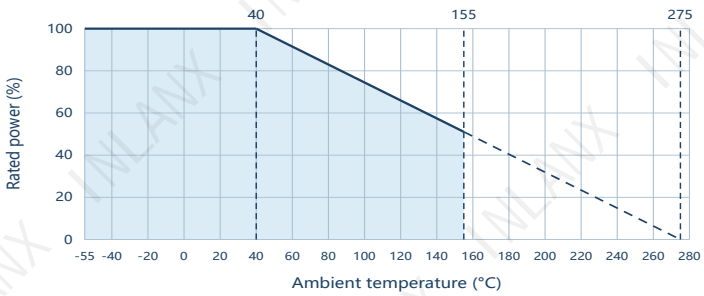

Ordering Example

RXLG-A - 100W - 50Ω - ±5%

Model / Power / Nominal resistance / Tolerance